



Shielded SMT Power Inductor SPRI2D15HP Series


■ Feature

- Magnetically shielded structure that ensures the high-density mounting configuration.
- Flat bottom surface ensures secure, reliable mounting.

■ Application

- Low profile/ large current specifically suitable for Portable telephones, hard disk drives, PDA, DSC and other electronic equipments.

■ SHAPES AND DIMENSIONS

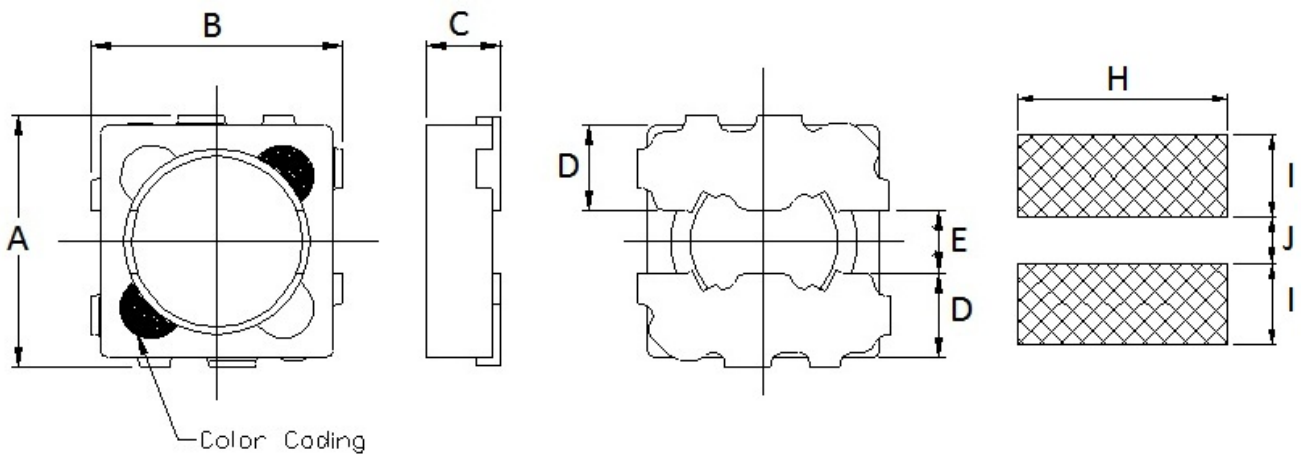

Unit	A	B	C max	D	E
mm	3.2 ±0.2	3.2 ±0.2	1.6	1.10	0.8
inch	0.126 ±0.008	0.126 ±0.008	0.063	0.043	0.031

H	I	J
3.60	1.40	0.80
0.142	0.055	0.031

Marking : Color Coding



■ PART NUMBER CODE

<u>SPRI</u>	<u>2D15</u>	<u>HP</u>	<u>6R8</u>	<u>M</u>	<u>A</u>
1	2	3	4	5	6

1. Series Name
2. Size Code
3. Type Code
4. Inductance (R=Decimal Point) Unit : uH
6R8 = 6.8uH
5. Inductance tolerance :
“M” ±20%; “N” ±30%.
6. Soldering : A=Lead free

■ ELECTRICAL CHARACTERISTICS

1. Test equipments
 - 1.1. L,Idc : Agilent/HP 4284A Precision LCR Meter , 1KHz with 1V.
 - 1.2. Rdc: Chroma Milli-ohm meter 16502 or equivalent. (Typ: ±30% tolerance)
 - 1.3. Idc for Inductance drop 10% or 35% from its value without current.
 - 1.4. Irms for a 25°C or 40°C rise above 25°C ambient.
 - 1.5. Operating temperature range -25°C to 105°C




2. Part Number and Characteristics Table

Part Number	Inductance	Inductance	Rdc(Ω)	Idc Typ (mA)		Irms Typ (mA)		Color Coding
	(uH) /KHz	Tolerance	Typ	L ↓ 10%	L ↓ 35%	T ↑ 25℃	T ↑ 40℃	
SPRI2D15HP-R47□A	0.47	N	0.040	3000	3400	2200	3400	Black
SPRI2D15HP-1R0□A	1.00	M, N	0.049	2600	3000	2000	3000	Black
SPRI2D15HP-1R2□A	1.20	N	0.083	2300	2500	1900	2300	Brown
SPRI2D15HP-1R5□A	1.50	M, N	0.090	2100	2500	1500	2000	Brown
SPRI2D15HP-2R2□A	2.20	M, N	0.090	1800	2100	1280	1800	Red
SPRI2D15HP-2R7□A	2.70	M, N	0.120	1600	1800	1200	1700	White
SPRI2D15HP-3R3□A	3.30	M, N	0.149	1500	1720	1100	1600	Orange
SPRI2D15HP-3R9□A	3.90	M, N	0.158	1400	1560	1020	1500	Yellow
SPRI2D15HP-4R7□A	4.70	M, N	0.197	1300	1500	960	1200	Black
SPRI2D15HP-5R6□A	5.60	M, N	0.232	1200	1300	940	1100	Black
SPRI2D15HP-6R8□A	6.80	M, N	0.266	1100	1300	840	1000	Brown
SPRI2D15HP-100□A	10.0	M	0.403	940	1100	740	850	Red
SPRI2D15HP-150□A	15.0	M	0.567	760	860	600	700	Orange
SPRI2D15HP-220□A	22.0	M	0.905	600	680	460	580	Yellow
SPRI2D15HP-330□A	33.0	M	1.486	440	480	400	420	Black
SPRI2D15HP-470□A	47.0	M	1.814	400	440	260	390	Brown
SPRI2D15HP-680□A	68.0	M	3.520	290	330	260	350	Orange

When ordering, please specify tolerance and packaging codes. Ex: SPRI2D15HP-100MA ;
 Tolerance : M = ±20% , N = ±30% ; Packaging: Clear tape and reel { standard }.



REEL DIMENSIONS AND PACKAGING QUANTITY

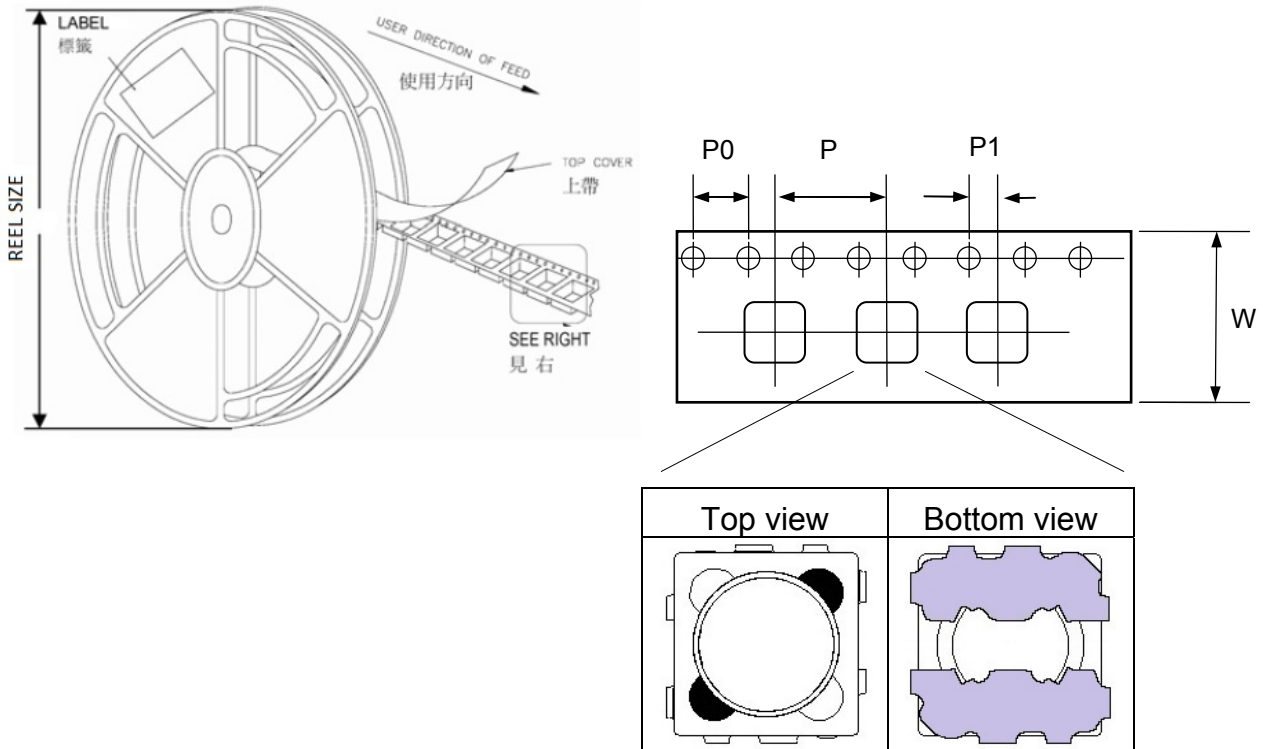


Unit: mm

TYPE	W	P	P0	P1	REEL SIZE	PCS / REEL
SPRI2D15HP	12	8	4	2	180 mm (7")	1000



■ RELIABILITY AND TEST CONDITION

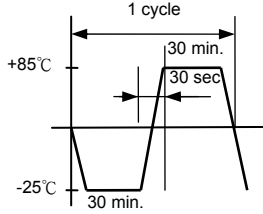Item (項目)	Required Characteristics (要求)	Test Method/Condition (測試方法)
Solderability	The metalized area must have 90% minimum solder coverage.	Dip pads in flux and dip in solder pot (96.5 Sn/3.5 Ag solder) at 255°C ±5°C.
Resistance to soldering heat	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be reflowed onto a PC board using 96.5 Sn/3.5 Ag solder paste. Solder process shall be at a maximum temperature of 260°C. For 96.5 Sn/3.5 Ag solder paste:>217°C for 90 seconds
Vibration	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Solder specimen inductor on the test printed circuit board. Apply vibrations in each of the x, y and z directions for 2 house for a total of 6 hours. Frequency : 10~50 Hz Amplitude : 1.5mm
High temperature resistance	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to temperature 85±2°C for 50±12 hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Static Humidity	Inductors must not have a shorted or open winding.	Inductors shall be subjected to temperature 85±2°C and 90 to 95%RH for ten 24hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Component adhesion (push test)	Inductors shall be subjected to 0.5Kg	Inductors shall be reflow soldered (255°C ±5°C for 10 seconds) to a tinned copper substrate. A force gauge shall be applied to the side of the component. The device must withstand the stated force without a failure of the termination.
Low temperature storage	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to temperature -25±2°C for 48±12 hours. Measure the test items after leaving the inductors at room temperature and humidity for 1 to 2 hours.
Resistance to solvent	There must be no case deformation, change in dimensions, or obliteration of marking.	Inductors must withstand 6 minutes of alcohol or water.
Thermal shock	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to 10 cycles to the following temperature cycle:  Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.




■ RECOMMENDED SOLDERING CONDITIONS

Please use this product by reflow soldering

1. Recommended Reflow Pattern

Reflow : until two times

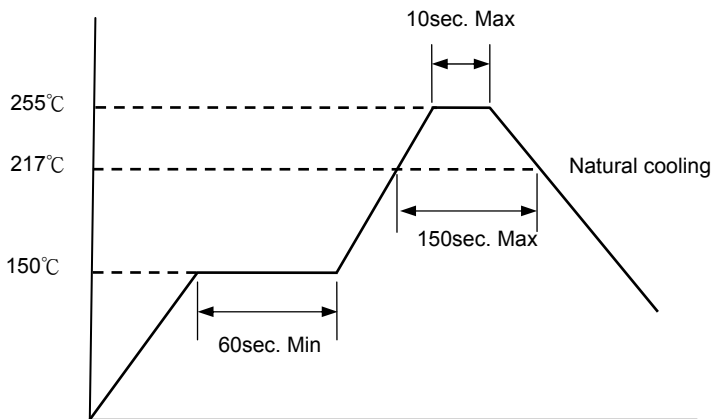

2. Iron Soldering

Use a solder iron of less than 30W when soldering, do not allow the soldering iron tip directly touch the Ceramic body outside of terminal electrode.
5 seconds max. at 260°C.

3. Attention in Case of Using

In case of using product, please avoid following matters:

- Splashing water or salt water
- Dew condens
- Toxic gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
- Vibrations or shocks which exceed the specified condition

Please be careful for the stress to this product by board flexure or something after the mounting.

4. Other

Operating temperature range : Ferrite Series :-25~+105°C

Storage condition : Temperature 20 °~25°C, Relative Humidity 40%~60%

Recommended wire wound inductors should be used within 6 months from the time of delivery.