



## SMD CAP Aluminum Solid Electrolytic Capacitor - ECAS series

### ■ Introduction

- Low ESR, SMD type, Reduced height, Wide temperature range
- Rated voltage: 2.0 V, 2.5Vdc.
- Endurance: 2,000 hours at 105°C
- Suitable for DC-DC converters, voltage regulators and decoupling applications
- RoHS Compliant




### ■ Specifications

ITEMS	CONDITIONS	CHARACTERISTICS	
<b>Category Temperature Range</b>		-55 to +105°C	
<b>Rated Voltage Range</b>		2V, 2.5 Vdc	
<b>Capacitance Tolerance</b>	at 20°C, 120Hz	$\pm 20\%$ (M); $+10\% \sim -35\%$ (Y); $\pm 10\%$ (K)	
<b>Leakage Current</b>	at 20°C , after 2 minutes	$I \leq 0.1CV$ I:Leakage Current( $\mu A$ ) / C:Rated Capacitance( $\mu F$ ) / V:Rated Voltage(V)	
<b>Surge Voltage</b>	15°C to 35°C	Rated voltage $\times 1.25V$	
<b>Dissipation Factor (<math>\tan \delta</math>)</b>	at 20°C, 120Hz	Case Height : S type, 0.06 max.	
<b>Endurance</b>	105°C , rated voltage applied, 2,000 hours	Appearance	No significant damage
		Capacitance Change	$\pm 20\%$ of the initial value
		DF ( $\tan \delta$ )	$\leq 200\%$ of the initial specified value
		Leakage current	$\leq 300\%$ of the initial specified value
<b>Damp Heat, Steady State</b>	60°C, 90 to 95% RH, 500 hours.	Appearance	No significant damage
		Capacitance Change	+70%, -20% of the initial value
		DF ( $\tan \delta$ )	$\leq 200\%$ of the initial specified value
		Leakage current	Within the initial specified value
<b>Damp Heat, Steady State, Applied voltage</b>	60°C, 90 to 95% RH, rated voltage, 500 hours.	Appearance	No significant damage
		Capacitance Change	+70%, -20% of the initial value
		DF ( $\tan \delta$ )	$\leq 200\%$ of the initial specified value
		Leakage current	Within the initial specified value
<b>Surge Voltage</b>	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltages, 125% rated voltage, at 15°C to 35°C for 30 seconds through a protective resistor ( $R=1k\Omega$ ) and discharge for 5 minutes 30 seconds.	Appearance	No significant damage
		Capacitance Change	$\pm 10\%$ of the initial value
		DF ( $\tan \delta$ )	Within the initial specified value
		Leakage current	Within the initial specified value



## ■ Shape and Dimensions (Unit: mm)

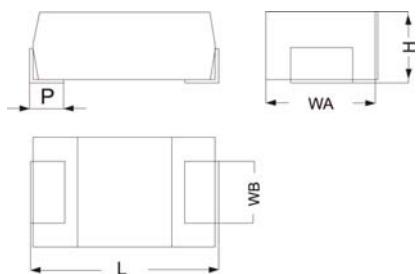

Case size	L	WA	WB	H	P
S	7.3±0.3	4.3±0.3	2.4±0.2	1.9±0.2	1.3±0.2

## ■ Electrical Characteristics

Part No.	Cap(μF) @120Hz	ESR Max (mΩ) @ 100kHz	WV(VDC)	tan δ Max @120Hz	Leakage Current (μA) Max	Ripple Current (A r.m.s) @100kHz
<b>ECASS-221E15-2R0</b>	220	15	2	0.06	44	5.1
<b>ECASS-221E09-2R0(Y)</b>	220	9		0.06	44	6.3
<b>ECASS-331E09-2R0(Y)</b>	330	9		0.06	66	6.3
<b>ECASS-331E06-2R0</b>	330	6		0.06	66	7.5
<b>ECASS-221E15-2R5</b>	220	15	2.5	0.06	55	5.1
<b>ECASS-221E09-2R5(Y)</b>	220	9		0.06	55	6.3
<b>ECASS-331E09-2R5(Y)</b>	330	9		0.06	82.5	6.3
<b>ECASS-331E06-2R5</b>	330	6		0.06	82.5	7.5

Temperature Compensation Multipliers for Ripple Current		
≤45°C	45°C < T ≤ 85°C	85°C < T ≤ 105°C
1.0	0.7	0.25

## ■ Ordering Information

EC AS S 331 E09 2R5  
 1 2 3 4 5 6

1. SMD Type
2. Series Name
3. Case Height
4. Capacitance : **331**=330 μF.
5. ESR : **E09**= 9 mΩ.
6. Working Voltage(WV) : **2R0** = 2.0 VDC ; **2R5** = 2.5 VDC.
7. Capacitance tolerance : **Blank**= ± 20% ; **Y**= +10~-35% ..